



RevEAL
 Revolutionary Entertainment & Architectural Lighting™


**PROFILE
 Junior**

The RevEAL Profile Junior luminaire is a tunable white, true high-CRI, LED profile spot with high lumen output. Its debut follows the successful launch of the multi-award winning RevEAL Profile. The Profile Junior's size and weight are similar to conventional tungsten source ellipsoids.

The new 10,000-lumen fixture features a variable CCT range of 2800K to 6500K. It has adjustable focus from hard to soft edge and accommodates all standard ETC SOURCE FOUR® lens barrels. It also offers four shutters on a tri-plane; a B-Sized Gobo; DMX, Artnet and local control; and universal AC input from 85-265 VAC.

The RevEAL Profile Junior, utilizing TrueSource Real-Time Optical Feedback Technology, produces amazingly pure (CRI>93) and consistent tunable white light with adjustable green/magenta correction, and lumen output performance greater than a conventional 575W ellipsoidal fixture.

Advanced algorithms in Prism's TrueSource Optical and Color Management Technology produce amazingly consistent colors between instruments and over the life of the LEDs. TrueSource, incorporated in all RevEAL products, encompasses a real-time optical feedback sensor, which, through constant monitoring of light output, ensures precise and accurate color. The optical sensor samples and feeds color data to advanced algorithms, which guarantees performance. All RevEAL lighting instruments are single source beam which eliminates color separation and unpleasing striations.

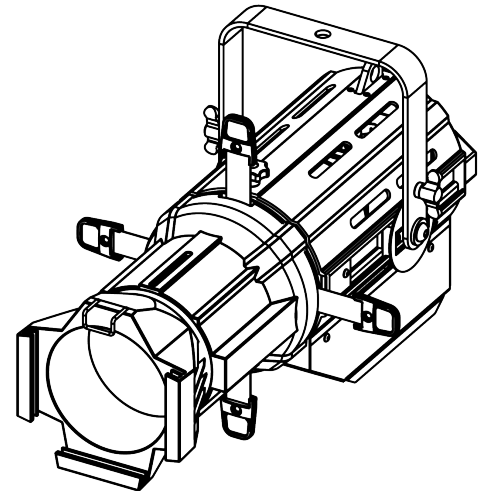

See what you've been missing™

Features

- » 10,000 Lumen Output
- » TrueSource - Integrated Optical Feedback for Specifiable and Repeatable Color Temperature
- » Tunable White CCT (2,800K-6,500K)
- » Interchangeable Lenses
 Compatible with all ETC SOURCE FOUR® Lens Tubes
- » 4 Shutters on a Tri-plane
- » Color Rendering Index (CRI) Exceeds 93
- » Overall Dimensions Back End 11.9 x 9.8 x 9.8 inches
- » Weight 20 lbs
- » DMX, Artnet, and Local Control
- » Universal AC Input (85-265 VAC)

Ordering Information:

J1-10K4-LXX-001

Profile Junior, Black

Accessories / Options:

J-LXX

XX° Lens for Profile Junior

J-ZM

Zoom Lens for Profile Junior

Prism Projection, Inc. © Copyright 2012. All Rights Reserved. Multiple International Patents Pending


www.prismprojection.com | info@prismprojection.com

8228 East 124th St. South | Sully, IA 50251-0448 | 641-594-3356




Revolutionary Entertainment & Architectural Lighting™

Physical

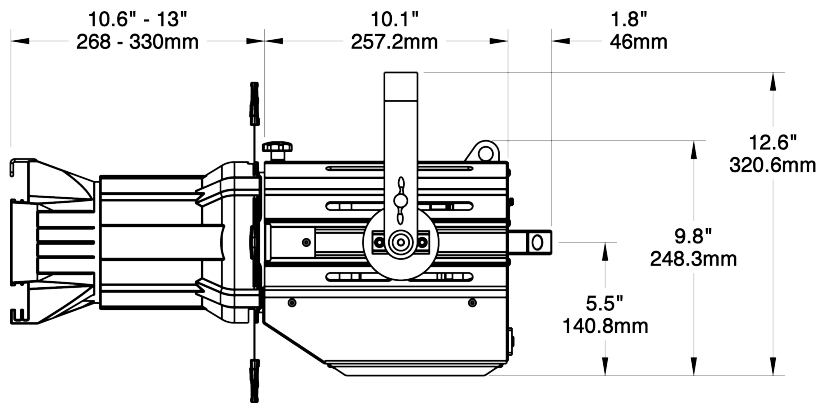


Weight 20 lbs. (9.1 kg)

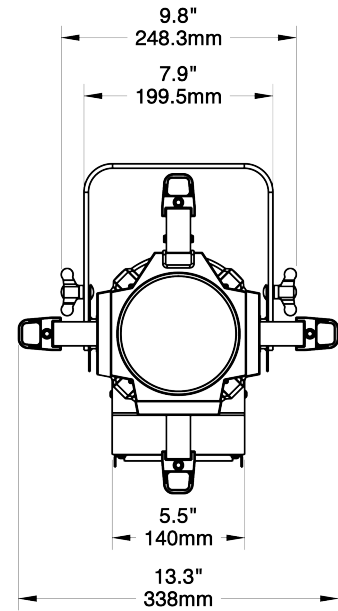

Photometrics

Beam Angle	Beam Diameter (ft)				
14°	-	4.0	8.1	12.1	16.1
19°	-	5.5	11.0	16.5	22.0
26°	3.8	7.6	15.1	22.7	30.3
36°	5.3	10.7	21.3	32.0	-
50°	7.6	15.3	30.6	-	-

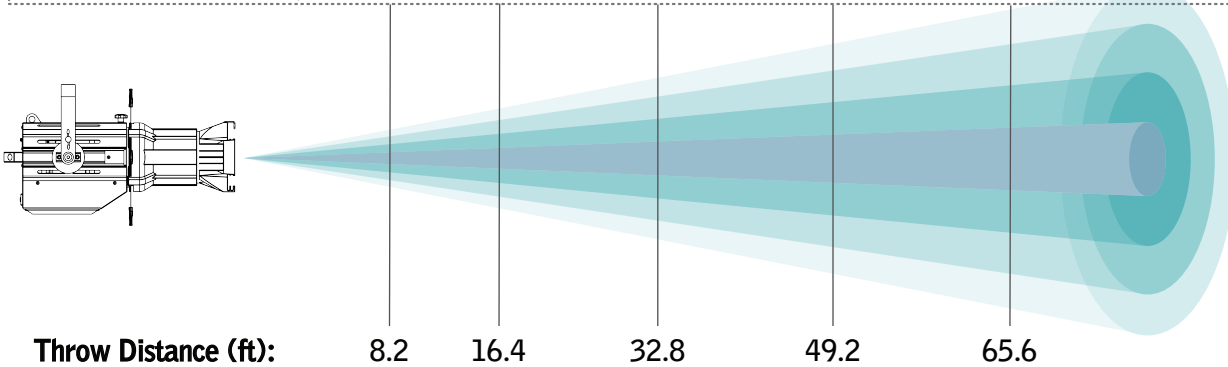

Beam Angle	Average Illuminance (fc)					Field Lumens
14°	-	812	203	90	51	10,345
19°	-	478	120	53	30	11,313
26°	1,064	266	66	30	17	11,976
36°	492	123	31	14	-	10,969
50°	236	59	15	-	-	10,843

Prism Projection, Inc. © Copyright 2012. All Rights Reserved. Multiple International Patents Pending

www.prismprojection.com | info@prismprojection.com

8228 East 124th St. South | Sully, IA 50251-0448 | 641-594-3356



SOURCE FOUR® is a registered trademark of Electronic Theatre Controls, Inc.